


POWER PRESERVED GLULAM™ DECK GUIDE

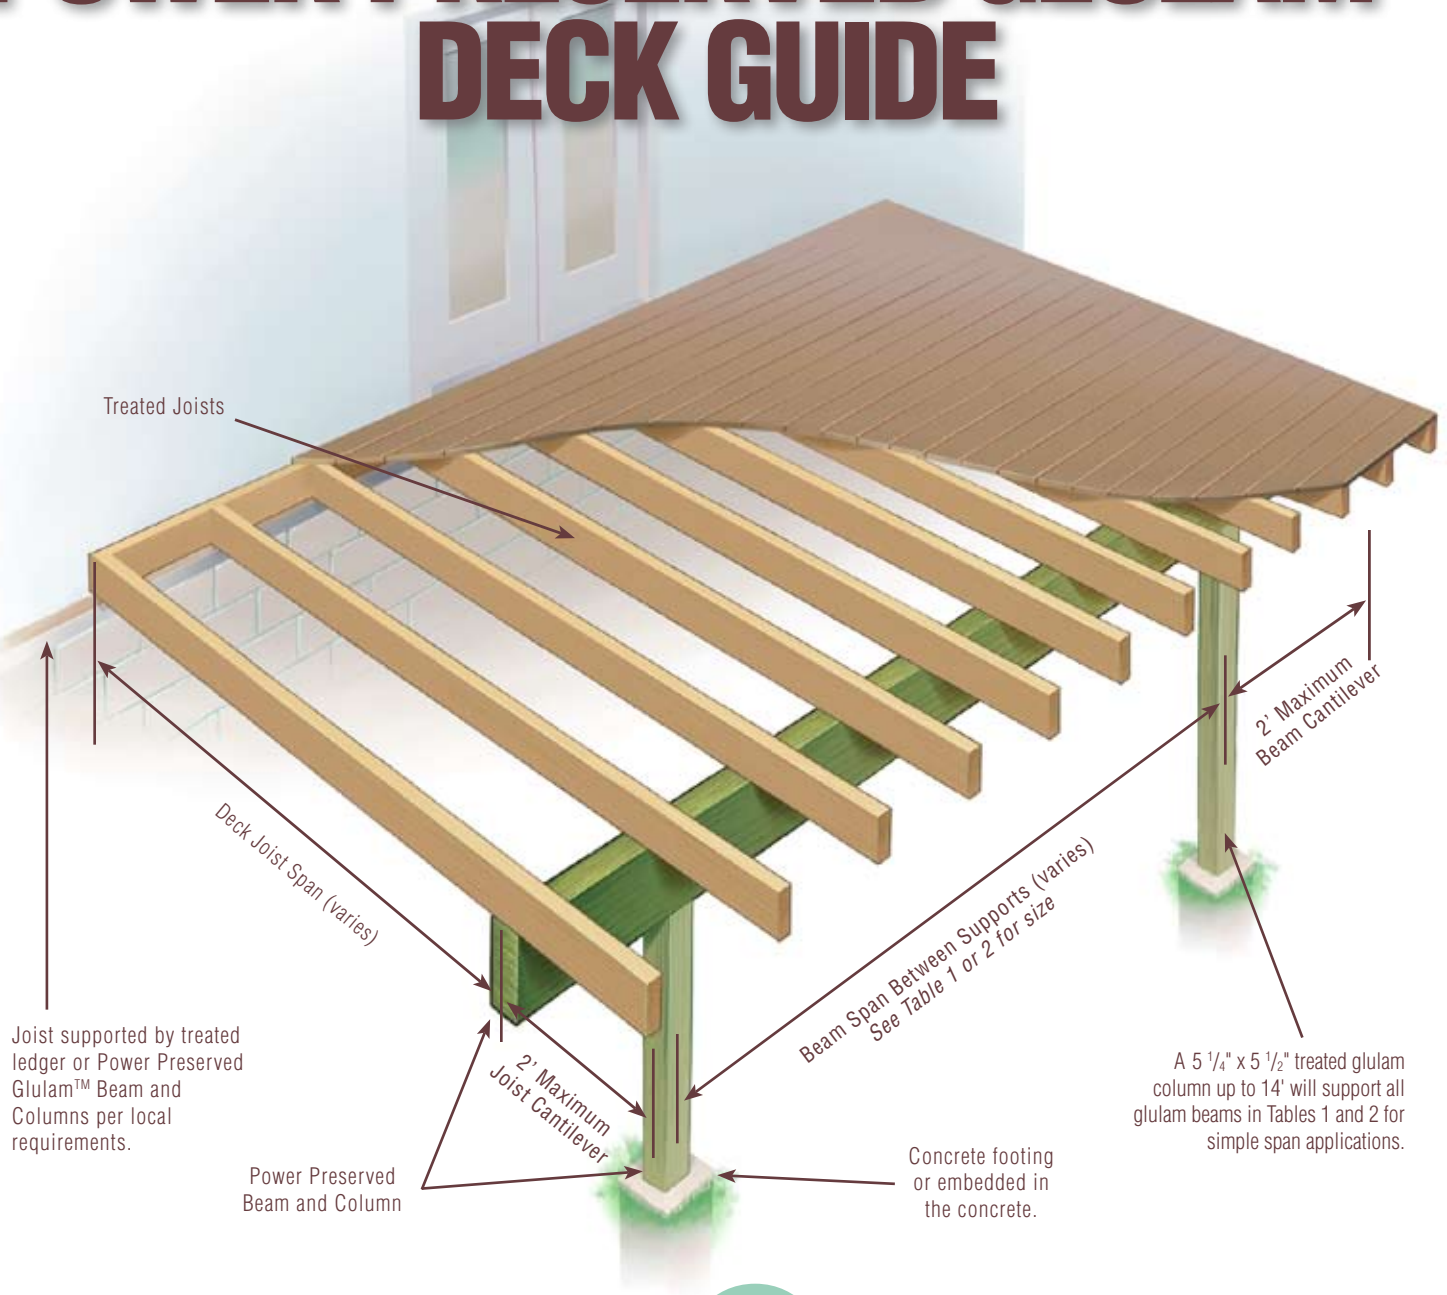

Tomorrow's Engineered Wood - Today™

P.O. Box 1877 ▲ El Dorado, AR 71731 ▲ 800-221-2326 ▲ www.anthonyforest.com

©Anthony Forest Products Company



General Notes

- Ledger connection is critical. Consult deck designer for connection or install a Power Preserved Glulam™ Beam on Columns beside wall. Use same size beam as selected for front of deck.
- For column sizes less than 5 1/4" x 5 1/2" in this deck guide please consult supplier for proper column sizing.
- If using 2x6 or 2x8 PT SYP deck joist whereby creating a two span application consult your deck designer or AFP since an additional Power Preserved Glulam Beam and Columns will be required. The center treated glulam beam must be sized since it is supporting the deck on both sides versus the outside beam which is supporting only half of the deck joist span.

Power Preserved Glulam™ Beam Size Selection Table

EWS 24F-V5M1/SP Dry-Use $F_b=2,400$ psi $F_v=300$ psi $F_c=740$ psi $E=1.8 \times 10^6$ psi

Table 1 - Simple Span Beam (NO CANTILEVER)

Load (PSF)	Beam Span Between Supports Simple Span	Deck Joist Span				
		8'	10'	12'	14'	16'
40 PSF Live Load 10 PSF Dead Load	10'	3 1/2" x 9 1/4"	3 1/2" x 9 1/4"	3 1/2" x 9 1/4"	3 1/2" x 9 1/4"	3 1/2" x 9 1/4"
	12'	3 1/2" x 9 1/4"	3 1/2" x 9 1/4"	3 1/2" x 9 1/2"	3 1/2" x 9 1/2"	3 1/2" x 11 1/4" 5 1/4" x 9 1/4"
	14'	3 1/2" x 11 1/4" 5 1/4" x 9 1/4"	3 1/2" x 11 1/4" 5 1/4" x 9 1/4"	3 1/2" x 11 1/4" 5 1/4" x 9 1/4"	3 1/2" x 11 1/4" 5 1/4" x 11 1/4"	3 1/2" x 11 7/8" 5 1/4" x 11 1/4"
	16'	3 1/2" x 11 1/4" 5 1/4" x 9 1/2"	3 1/2" x 11 7/8" 5 1/4" x 11 1/4"	3 1/2" x 14" 5 1/4" x 11 1/4"	3 1/2" x 14" 5 1/4" x 11 1/4"	3 1/2" x 14" 5 1/4" x 11 7/8"
	18'	3 1/2" x 14" 5 1/4" x 11 1/4"	3 1/2" x 14" 5 1/4" x 11 1/4"	3 1/2" x 14" 5 1/4" x 11 7/8"	3 1/2" x 16" 5 1/4" x 14"	*3 1/2" x 16" 5 1/4" x 14"
	20'	3 1/2" x 14" 5 1/4" x 11 7/8"	3 1/2" x 16" 5 1/4" x 14"	3 1/2" x 16" 5 1/4" x 14"	*3 1/2" x 16" 5 1/4" x 14"	*3 1/2" x 18" 5 1/4" x 16"
	22'	3 1/2" x 16" 5 1/4" x 14"	3 1/2" x 16" 5 1/4" x 14"	*3 1/2" x 18" 5 1/4" x 16"	*3 1/2" x 18" 5 1/4" x 16"	*3 1/2" x 18" 5 1/4" x 16"
60 PSF Live Load 10 PSF Dead Load	10'	3 1/2" x 9 1/4"	3 1/2" x 9 1/4"	3 1/2" x 9 1/4"	3 1/2" x 9 1/4"	3 1/2" x 9 1/2"
	12'	3 1/2" x 9 1/2"	3 1/2" x 11 1/4" 5 1/4" x 9 1/4"	3 1/2" x 11 1/4" 5 1/4" x 9 1/4"	3 1/2" x 11 1/4" 5 1/4" x 9 1/2"	3 1/2" x 11 7/8" 5 1/4" x 11 1/4"
	14'	3 1/2" x 11 1/4" 5 1/4" x 11 1/4"	3 1/2" x 11 7/8" 5 1/4" x 11 1/4"	3 1/2" x 14" 5 1/4" x 11 1/4"	*3 1/2" x 14" 5 1/4" x 11 1/4"	*3 1/2" x 14" 5 1/4" x 11 7/8"
	16'	3 1/2" x 14" 5 1/4" x 11 1/4"	3 1/2" x 14" 5 1/4" x 11 7/8"	*3 1/2" x 14" 5 1/4" x 14"	*3 1/2" x 16" 5 1/4" x 14"	*3 1/2" x 16" 5 1/4" x 14"
	18'	3 1/2" x 16" 5 1/4" x 14"	*3 1/2" x 16" 5 1/4" x 14"	*3 1/2" x 16" 5 1/4" x 14"	*3 1/2" x 18" 5 1/4" x 16"	5 1/4" x 16"
	20'	3 1/2" x 16" 5 1/4" x 14"	*3 1/2" x 18" 5 1/4" x 16"	*3 1/2" x 18" 5 1/4" x 16"	5 1/4" x 16"	5 1/4" x 18"
	22'	*3 1/2" x 18" 5 1/4" x 16"	5 1/4" x 16"	5 1/4" x 18"	5 1/4" x 18"	5 1/4" x 18"

Table 2 - Beam with Maximum 2' CANTILEVER

Load (PSF)	Beam Span Between Supports with Maximum 2' Cantilever	Deck Joist Span				
		8'	10'	12'	14'	16'
40 PSF Live Load 10 PSF Dead Load	10'	3 1/2" x 9 1/4"	3 1/2" x 9 1/4"	3 1/2" x 9 1/4"	3 1/2" x 9 1/4"	3 1/2" x 9 1/4"
	12'	3 1/2" x 9 1/4"	3 1/2" x 9 1/4"	3 1/2" x 9 1/2"	3 1/2" x 11 1/4" 5 1/4" x 9 1/4"	3 1/2" x 11 1/4" 5 1/4" x 9 1/4"
	14'	3 1/2" x 11 1/4" 5 1/4" x 9 1/4"	3 1/2" x 11 1/4" 5 1/4" x 9 1/4"	3 1/2" x 11 1/4" 5 1/4" x 9 1/2"	3 1/2" x 11 7/8" 5 1/4" x 11 1/4"	3 1/2" x 11 7/8" 5 1/4" x 11 1/4"
	16'	3 1/2" x 11 7/8" 5 1/4" x 11 1/4"	3 1/2" x 14" 5 1/4" x 11 1/4"	3 1/2" x 14" 5 1/4" x 11 1/4"	3 1/2" x 14" 5 1/4" x 11 1/4"	3 1/2" x 14" 5 1/4" x 11 7/8"
	18'	3 1/2" x 14" 5 1/4" x 11 7/8"	3 1/2" x 14" 5 1/4" x 11 7/8"	3 1/2" x 14" 5 1/4" x 14"	3 1/2" x 16" 5 1/4" x 14"	3 1/2" x 16" 5 1/4" x 14"
	20'	3 1/2" x 16" 5 1/4" x 14"	3 1/2" x 16" 5 1/4" x 14"	3 1/2" x 16" 5 1/4" x 14"	3 1/2" x 18" 5 1/4" x 14"	3 1/2" x 18" 5 1/4" x 16"
	22'	3 1/2" x 16" 5 1/4" x 14"	3 1/2" x 18" 5 1/4" x 16"	3 1/2" x 16" 5 1/4" x 16"	3 1/2" x 18" 5 1/4" x 16"	5 1/4" x 16"
60 PSF Live Load 10 PSF Dead Load	10'	3 1/2" x 9 1/4"	3 1/2" x 9 1/4"	3 1/2" x 9 1/4"	3 1/2" x 9 1/2"	3 1/2" x 11 1/4" 5 1/4" x 9 1/4"
	12'	3 1/2" x 11 1/4" 5 1/4" x 9 1/4"	3 1/2" x 11 1/4" 5 1/4" x 9 1/4"	3 1/2" x 11 1/4" 5 1/4" x 9 1/2"	3 1/2" x 11 7/8" 5 1/4" x 11 1/4"	3 1/2" x 11 7/8" 5 1/4" x 11 1/4"
	14'	3 1/2" x 11 7/8" 5 1/4" x 11 1/4"	3 1/2" x 14" 5 1/4" x 11 1/4"	3 1/2" x 14" 5 1/4" x 11 1/4"	3 1/2" x 14" 5 1/4" x 11 7/8"	3 1/2" x 14" 5 1/4" x 11 7/8"
	16'	3 1/2" x 14" 5 1/4" x 11 1/4"	3 1/2" x 14" 5 1/4" x 11 7/8"	3 1/2" x 16" 5 1/4" x 14"	3 1/2" x 16" 5 1/4" x 14"	3 1/2" x 16" 5 1/4" x 14"
	18'	3 1/2" x 16" 5 1/4" x 14"	3 1/2" x 16" 5 1/4" x 14"	3 1/2" x 18" 5 1/4" x 14"	3 1/2" x 18" 5 1/4" x 16"	3 1/2" x 18" 5 1/4" x 16"
	20'	3 1/2" x 18" 5 1/4" x 14"	3 1/2" x 18" 5 1/4" x 16"	3 1/2" x 18" 5 1/4" x 16"	5 1/4" x 18"	5 1/4" x 18"
	22'	3 1/2" x 18" 5 1/4" x 16"	5 1/4" x 18"	5 1/4" x 18"	5 1/4" x 18"	Reduce Beam Span

How to Use This Table

- Select correct Table to use:
 - Table 1 Beam (No Cantilever)
 - Table 2 Beam with Maximum 2' Cantilever
- Select Deck Design Load- 40 PSF or 60 PSF live load.
- Determine Deck Joist Span. This does not include any cantilever.
- Determine desired Beam Length- span from center to center of column.
- Locate box that intersects desired column and row.
- Select Power Preserved Glulam Beam™ width and depth. If box shows two sizes you can use either size.

General Notes

- Total load deflection for the beam is limited to L/240. Live load deflection is limited to L/360. Cantilever deflection is limited to 2L/180.
- Minimum bearing length is 1 3/4" at ends for simple span, except in shaded area with an " requires 2 1/2" bearing, 3 1/2" at cantilever.
- For continuous span applications with or without maximum 2' cantilever (up to 52' length), increase intermediate supports to 5/4" and use Table 1, assuming equal spans, example 16'-16'-16'. For all other applications contact your supplier.
- Bearing is required across full width of beam. Use metal post cap at beam to column connection or notch column to accept beam according to Prescriptive Residential Wood Deck Guide (DCA6-American Wood Council) based on the 2006 International Residential Code (IRC).
- Ledge connections at the wall are critical, consult deck designer for connection or install a beam supported on columns beside wall. Use the same size beam you select for the front of the deck.
- For additional information on ledger connections, bearing requirements, diagonal bracing requirements, joist to beam connections and footings, consult the DCA 6 for a free download found on our website under Treated Glulam or American Wood Council's site at www.awc.org/Codes/dcaindex.html
- For additional information on Power Preserved Glulam™ visit our website at www.anthonystore.com or contact us at 1-800-221-2326.
- Power Preserved Glulam™ is pressure treated with Hoover Cop-Guard™ (a Copper Naphthenate formulation) at .04 pcf retention for above ground use and Power Preserved Column™ is treated to 0.13 pcf for ground contact use.
- Power Preserved Glulam™ products will resist fungal decay and wood –destroying insect attacks and is covered by a 25 year warranty by Hoover.